

SLIPGrip[®]

Stair Riser Plates



DESIGN

SUPPLY

FABRICATE

INSTALL



SlipGrip® Riser Plates fit onto the vertical part of the step in order to complete the look when installing SlipGrip® Anti Slip Stair Tread Covers. Ideal for areas where aesthetics are important such as restaurants, nightclubs, office buildings, leisure centres, shopping malls and sports venues.

The Riser Plates are made from fibreglass materials so they will not rot, twist or warp. The front surface has a smooth finish.

We offer a free cut to size service with our Riser Plates.

CHARACTERISTICS

- Fully covers existing riser substrates
- Visually transforms existing internal and external staircases
- Constructed from high strength fibreglass
- Easy to maintain and clean - just wipe clean with warm, soapy water
- Quick and easy installation
- Easily combines with our range of SlipGrip® Anti Slip Stair Tread Covers
- Durable and tough - long-lasting in areas of medium to high foot traffic
- Resistant to impact and corrosion
- Free cut to size service

SUITABLE APPLICATIONS

- ✓ Restaurants
- ✓ Nightclubs
- ✓ Office buildings
- ✓ Leisure centres
- ✓ Shopping malls
- ✓ Sporting venues
- ✓ Staircases with a need for pleasing aesthetics as well

SUITABLE SUBSTRATES

- ✓ Wood
- ✓ Concrete
- ✓ Metal
- ✓ Stone

TECHNICAL DATA

Standard lengths:	600mm 750mm 800mm 1000mm 1200mm 1500mm 2000mm 3000mm
Height:	145mm
Colours:	Black
Thickness:	4mm

PERSONAL PROTECTION EQUIPMENT

It is recommended that the following Personal Protection Equipment is worn for installation of SlipGrip® Riser Plates and further protective measures may be necessary but this will depend on the installation environment:

Bonding

- ✓ Eye Goggles
- ✓ Protective Gloves
- ✓ Safety Boots



Cutting & Mechanical Fixing

- ✓ Eye Goggles
- ✓ Protective Gloves
- ✓ Safety Boots
- ✓ Ear Defenders
- ✓ Dust mask
(available from FibreGrid)

HANDLING & STORAGE

Safe handling practices should always be employed and the appropriate Personal Protection Equipment is to be worn. Store the stair treads flat and upside down.



CUTTING

SlipGrip® Riser Plates can be cut to size using orbital cutting equipment with a diamond blade. Cutting should be carried out externally or where there is dust extraction or suitable ventilation and the appropriate protective equipment as detailed above should be worn. A jigsaw can be used for trimming, or for occasions where only a small amount of cutting is required.



Cut to size service

FibreGrid offers a free cut to size service for all SlipGrip® products except SlipGrip® Precision. When you place your order, inform the technical advisor that you intend to install the product yourself and they will tailor the order to meet your requirements.

PREPARATION



- ✓ Ensure that the area is clean, dry and free from loose and friable material.
- ✓ Any "dished" or damaged surface areas should be patch repaired to provide a reasonably flat and consistent surface. You can patch repair concrete with our SlipGrip® Step Edge Repair.
- ✓ Dry fit stair riser plates to ensure they fit freely and that they sit flat down on the surface. If required, SlipGrip® Riser Plates can be trimmed on site to suit, ideally using a skill saw with a 4mm diamond blade or an angle grinder with a 1mm blade.
- ✓ Please ensure that goggles and gloves are worn at all times when any form of cutting is involved.




These installation instructions are to be used as a guide. Always employ safe practices. It is recommended to first test the suitability of any fixing method on a small area before carrying out a full installation programme.


APPLICATION

Stair Riser Plates should be fitted before the Stair Tread Covers. Push the plates onto the riser as far down as they will go. When the Stair Tread Covers are fitted, they will hold the Riser Plates in position.

<p>1.</p> 	<p>Run a bead of adhesive around the perimeter of the Riser Plate approximately 25mm in from the edges and then cross hatch at about 200mm apart</p>
<p>2.</p> 	<p>Apply sufficient hand pressure to bed the Riser Plate into position. With SP350 High Tack Adhesive, optimum bonding will be achieved after 24 hours (at 20°C). However, stairs can be made available to foot traffic a few hours after bonding, but this is subject to temperature so it is worth testing first.</p>

APPLICATION

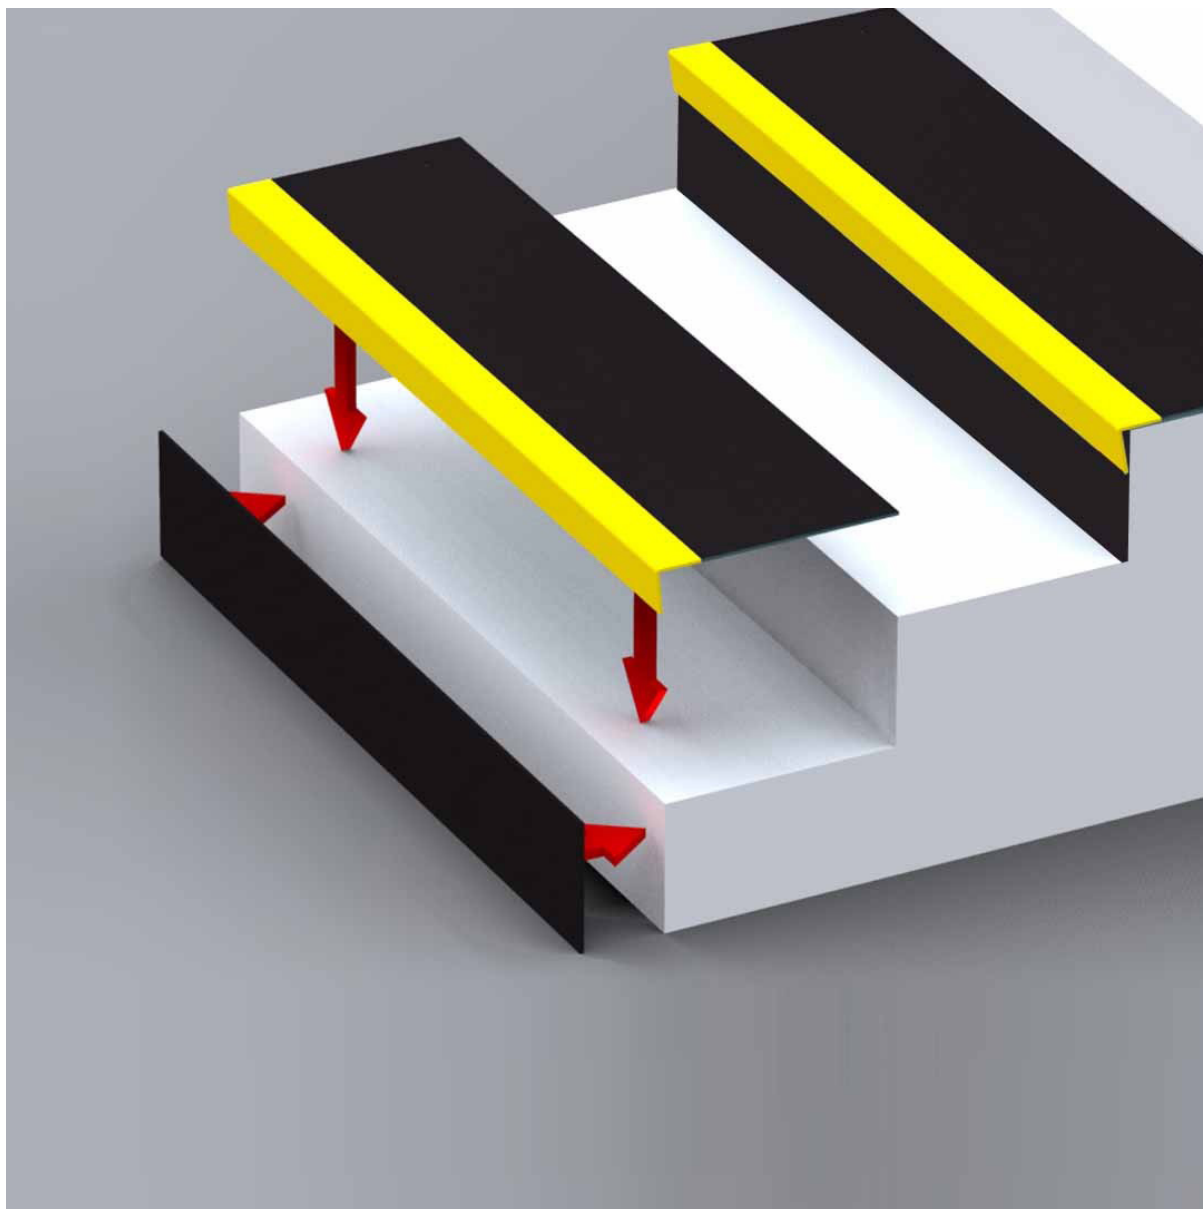

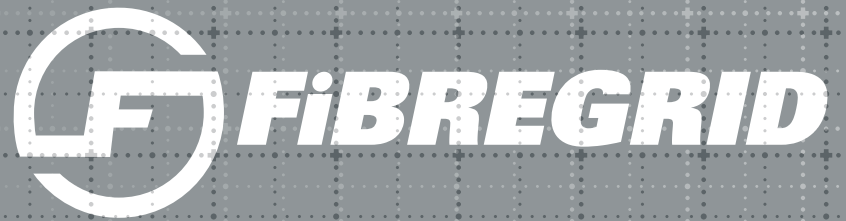

Southern Office:
Unit 2, Civic Industrial Estate,
Homefield Road Central,
Haverhill,
Suffolk,
CB9 8QP



Northern Office:
Kingston House,
3 Walton Road,
Pattinson North,
Washington,
Tyne & Wear,
NE38 8QA



www.fibregrid.com



Email: sales@fibregrid.com



Phone: 01440 712722



001